In the claims:

---

1. (original) A method for admitting a wireless message based on a phone-book record having a first record data mood-ring instance and a second record data source identifier comprising:

   receiving a choice of a mood-ring to determine at least one chosen mood-ring said at least one chosen mood-ring matching the first record data mood-ring instance;

   receiving a wireless message having a content indicator; and

   admitting the wireless message provided that the content indicator matches the second record data source identifier and the at least one chosen mood-ring matches the first record data mood-ring instance.

2. (original) The method for admitting of claim 1 further comprising:

   adding a mood-ring association to the phone-book record, wherein the first record data mood-ring instance comprises the mood-ring.

3. (original) The method for admitting of claim 2 wherein the step of adding a mood-ring comprises:

   selecting the phone-book record, and

   receiving a command to couple the phone-book record to the mood-ring.

4. (original) The method for admitting of claim 3 wherein the step of selecting a phone-book record comprises:

   listing a list of phone-book records; and

   receiving a name choice matching a list of phone-book records.

5.   (original) The method for admitting of claim 2 wherein the step of adding comprises:

adding a criterion to the phone-book record, wherein the second record data source identifier comprises the criterion.

6.   (original) The method for admitting of claim 5 wherein the step of adding a criterion comprises:

adding a phone-number to the phone-book record.

7.   (original) The method for admitting of claim 6 wherein the step of adding a criterion comprises:

adding an address to the phone-book record.

8.   (original) A mobile station for admitting a wireless message based on a phone-book record having a first record data mood-ring instance and a second record data source identifier, said phone-book record stored in memory of the mobile station, comprising:

an input device for receiving a choice of a mood-ring to determine at least one chosen mood-ring, said at least one chosen mood-ring matching the first record data mood-ring instance, and for storing to memory;

a receiver for receiving a wireless message having a content indicator; and

a processor for admitting the wireless message provided that the content indicator matches the second record data source identifier.

9.   (original) The mobile station for admitting of claim 8 further comprising:

a means for adding a mood-ring association to the phone-book record, wherein the first record data mood-ring instance comprises the mood-ring.

10.   (original) The method for admitting of claim 9 wherein the step of adding a mood-ring comprises:

a second input device for selecting the phone-book record, and for receiving a command to associate the phone-book record to the mood-ring.

11.   (original) The mobile station for admitting of claim 10 wherein the step of selecting a phone-book record comprises:

a display for listing a list of phone-book records; and

a third input device for receiving a name choice matching a list of phone-book records.

12.   (original) The mobile station for admitting of claim 9 wherein the step of adding comprises:

a second input device for adding a criterion to the phone-book record, wherein the second record data source identifier comprises the criterion.

13.   (original) The mobile station for admitting of claim 12 wherein the step of adding a criterion comprises:

a third input device for adding a phone-number to the phone-book record.

4 of 10

14. (original) The mobile station for admitting of claim 13 wherein the step of adding a criterion comprises:

 a fourth input device for adding an address to the phone-book record.

15. (currently amended) A method for selecting a mood-ring comprising:

 receiving a choice among at least one mood-ring <u>filter</u> wherein a chosen mood-ring <u>filter</u> is provided;

 using the chosen mood-ring <u>filter</u> to admit at least one wireless message.

16. (original) The method for selecting of claim 15 wherein the step of receiving comprises:

 receiving a mood-ring selection command; and

 listing at least one mood-ring indicator.

17. (original) The method for selecting of claim 16 wherein the step of receiving further comprises:
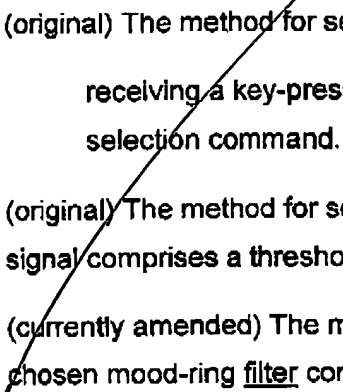
 highlighting a current mood-ring indicator; and

 receiving a cursor movement signal; and

 highlighting a second mood-ring indicator.

18. (original) The method for selecting of claim 16 wherein the step of receiving further comprises:

 editing the at least one mood-ring associated with the at least one mood-ring indicator.

19. (original) The method for selecting of claim 16

      receiving a key-press signal associated with a mood-ring
      selection command.

20. (original) The method for selecting of claim 19 wherein the key-press
      signal comprises a threshold setting signal.

21. (currently amended) The method for selecting of claim 15 wherein the
      chosen mood-ring filter comprises profile data.